



PHYSICS
USA



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

jc997 U.S. PTO
10/015852




CERTIFIED COPY OF PRIORITY DOCUMENT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

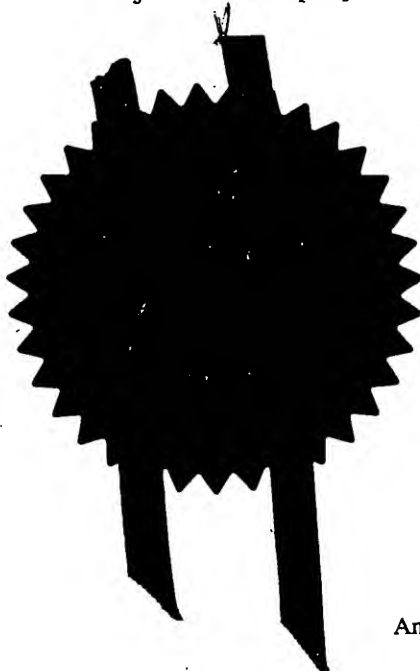


Signed

Dated

18 JUL 2001

Best Available Copy

This Page Blank (uspto)



140EC00 E591375-1 002879
P01/7700 0.00-0030450.1

1/77

Request for grant of a patent
(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office
Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference PHGB000173

2. Patent application number
(The Patent Office will fill in this part) **0030450.1**

3. Full name, address and postcode of the or of each applicant (underline all surnames)
KONINKLIJKE PHILIPS ELECTRONICS N.V.
GROENEWOUDSEWEG 1
5621 BA EINDHOVEN
THE NETHERLANDS

Patents ADP Number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

741929400
THE NETHERLANDS

4. Title of the invention
METHOD OF PROVIDING TRAVEL INFORMATION TO A MOBILE COMMUNICATIONS DEVICE

5. Name of your agent (if you have one)
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)
Andrew G. White
Philips Corporate Intellectual Property
Cross Oak Lane
Redhill
Surrey RH1 5HA

Patents ADP number (if you know it)

7658883001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number
Country **ES** Priority Application number **20010** Date of filing **2001**
(if you know it) (day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application
Number of earlier application **20010** Date of filing **2001**
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d).

Best Available Copy

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description

Claims(s)

Abstract

Drawings

14

10

1

4 only ✓

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination

(Patents Form 10/77)

Any other documents

(Please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 13-12-00

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 815339

(S. Townsend)

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes", Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION

**METHOD OF PROVIDING TRAVEL INFORMATION
TO A MOBILE COMMUNICATIONS DEVICE**

5

This invention relates to a method of providing travel related information to a mobile communications device, especially a mobile cellular telephone.

WO-A-99/63358 discloses a method and device relating to a network
10 position system which, in one implementation, can allow for the use of a mobile terminal to send position and time related data in addition to command functions such as a request for a taxi. A transport service provider such as a taxi company can then send data in reply to the mobile terminal confirming the booking and providing an anticipated waiting time before arrival of the
15 requested taxi.

It is of course desirable to avoid or at least minimise the waiting time before arrival of the requested taxi and WO-A-00/41413 discloses an alternative arrangement with the aim of achieving this in which a mobile telephone is pre-programmed with a message specifying a place and time for
20 pickup, and wherein the message is automatically sent to a transport service provider when the mobile telephone arrives at a specified location remote from the place for pickup. This arrangement has particular application where a regular passenger on a scheduled transport and in possession of such a telephone wishes to be met by a taxi upon his / her arrival at a scheduled
25 transport terminus, the message being sent as the user approached that terminus.

In so far as WO-A-00/41413 is used by a user on scheduled transport, a disadvantage of this arrangement is that where the user programs the absolute time-of-arrival (TOA) in accordance with published timetable
30 information, in the case of real-time delays in the scheduled transport, the proposed time for pick-up will be rendered inaccurate, i.e. the user may miss the proposed rendezvous with the taxi.

This Page Blank (uspto)

A further disadvantage of the arrangement in WO-A-00/41413 is the substantial burden placed on the user to pre-programme the message including the place and time for pickup, especially considering the typically rudimentary user interfaces present on mobile telephones and other mobile communications devices. Similarly, where a user wishes to access information about a specified place, for example using an internet enabled mobile telephone to access a list of hotels located in a specific area, the burden of data entry using the typically rudimentary user interface is again experienced.

It is therefore an object of the invention to provide a method and associated apparatus for providing travel related information to a mobile communications device, especially a mobile cellular telephone, which avoid or at least mitigate the aforementioned disadvantages.

According to the present invention, there is provided a method of providing travel related information to a user of a mobile communications device comprising the steps of determining whether the mobile communications device is either travelling on a transport, has recently travelled on a transport, or is likely to travel on a transport at some time in the near future; and depending on the outcome of that determination, displaying to a user of the mobile communications device selected travel related information.

The present invention is directed a mobile communications device which is intended to mean a device such as a mobile telephone, PDA or laptop which may be carried on and off a transport by a user and operable in a mode of operation that one would normally associate with such a device in both a travel and non-travel related context. By way of example, the same could not be said of a dedicated vehicle navigation system which is neither mobile in relation to a vehicle in which it is operative, nor is it capable of operating in a non-travel related context.

In relation to the mobile communications device of the present invention, travel related information might include information associated with travelling per se, perhaps in the form of advertising targeted to a traveller or

This Page Blank (uspto)

information obtained from a website, which may be connected to automatically upon the aforementioned determination. It may also include a menu of travel related options.

5 The travel related information may also include be associated with a user's journey or the transport taken by the user. An example of the latter is where the travel information includes the identity of at least one location on the route of the transport. Where the travel related information includes the identities of more than location on the route of the transport, in order to minimise the burden of data entry by the user, it is desirable if the user is able
10 to select as an option one of the locations displayed. I.e. based on the travel context, a user is provided with information which he / she would otherwise have to enter.

Where the transport is a scheduled transport, the travel related information may include the identity of at least one scheduled stop on the route
15 and ideally only include those stops at which the user may subsequently alight.

Again where the mobile communications device is determined to be travelling on the scheduled transport, the travel related information may further include estimated TOA information. In such a case, in order to calculate an estimate of the TOA of the scheduled transport for at least one subsequent
20 stop on route, it is necessary to providing an estimate of the current position of the mobile communications device and schedule information relating to the route of that transport. Where the travel related information includes the identities and TOAs for more than one stop on the route of the scheduled transport, it is desirable for the user to be able to select as an option one of the
25 stops displayed.

The travel related information may be displayed for the purpose of enabling the user of the mobile communications device to access over a wireless link supplementary travel related information from an information service provider. For example, for the user to obtain a list of hotels located
30 near to a station, that station having been selected by the user from a list of such stations on a given train route presented to the user.

This Page Blank (uspto)

The travel related information may be also displayed for the purpose of enabling to user of the mobile communications device to procure over a wireless link a travel related service for or on behalf of the user from a service provider. For example, a user may request a taxi with a pickup near to a station selected by the user from a list of such stations on a given train route presented to the user.

In either case, the travel related information may comprise a link to a website or mailbox of the information or service provider, and the supplementary travel related information or travel related service provided may be specifically related to a location on the route of the transport. Again in either case, the travel related information displayed may be merely an advertisement to access such supplementary travel related information or procure such a travel related service.

At least part of the determination of whether the mobile communications device is either travelling on a transport, has recently travelled on a transport, or is likely to travel on a transport at some time in the near future may be done by any or a combination for the following:

First, identifying whether the mobile communications device is currently or has recently received a message broadcasted from a transmitter located either on the scheduled transport, on or near the scheduled transport route or at or near a stop on the scheduled transport route.

Secondly, identifying whether the mobile communications device is located on the route of a scheduled transport or at or near a scheduled transport terminus. This would include where the mobile communications is currently or has recently received a message broadcasted from a transmitter located either on the scheduled transport, on or near the scheduled transport route or at or near a stop on the scheduled transport route, the message containing an estimate of the position of the transmitter, and wherein that position is used as an estimate of the position of the mobile communications device. Alternatively, it would also include where the mobile communications device comprises position determining means, for example, a GPS receiver or a communications receiver and communications processor adapted to

inis Page Blank (uspto)

determine the position of the mobile communications devices in co-operation with a plurality of cellular communication base stations.

It should be noted that this determination is not intended to include the scenario where general travel related information is provided to the user by an information beacon perhaps located near or in a transport terminus and the information automatically displayed to the user. An essential element of the determination is that the mobile communication is aware of its travel related context and behaves accordingly, and does not merely convey information to the user in a dumb fashion.

Thirdly, identifying whether the mobile communications device has been instructed by the user that either the user is travelling on a scheduled transport, has recently travelled on a scheduled transport or intends to travel on a scheduled transport at some time in the near future.

Fourthly, identifying whether the mobile communications device is currently in possession of an electronic ticket permitting travel on a scheduled transport. In such a case, the travel related information may be specifically related to a route identified by the electronic ticket or a stop on that route.

Further provided in accordance with the present invention is a mobile communications device as claimed in claims 29 to 51; and a travel information beacon as claimed in claims 52 to 61.

The present invention will now be described, by way of example only, with reference to the accompanying schematic drawings in which:

25

Figure 1 shows a mobile cellular telephone in accordance with the present invention, located on a train and communicating with both a travel information beacon located on the train and a nearby cellular telephone network base station;

30 Figure 2 shows the mobile cellular telephone of figure 1 in greater detail;

This Page Blank (uspto)

Figure 3 shows the travel information beacon of figure 1 in greater detail;

Figure 4 illustrates the route travelled by the train;

Figure 5 represents travel related information broadcast by the travel
5 information beacon of figure 1;

Figure 6 shows the cellular telephone of figure 1 accessing remote internet based services;

Figure 7 shows the apparatus employed by the remote internet based service provider of figure 6;

10 Figure 8 and 9 represents information transmitted by the mobile cellular telephone MS1 to effect remote internet based services;

Figure 10 shows a display of the cellular telephone of figure 1 for accessing remote internet based services as illustrated in figure 6;

Figure 11 shows a further mobile cellular telephone in accordance with
15 the present invention, located on a train, receiving GPS signals and communicating with a nearby cellular telephone network base station;

Figure 12 shows the mobile cellular telephone of figure 8 in greater detail;

Figure 13 represents travel related received by the mobile cellular
20 telephone of figure 11 from a cellular telephone network; and

Figure 14 illustrates an alternative deployment of travel information beacons in a train station.

It should be noted that the same reference signs are generally used to
25 refer to corresponding or similar features in different embodiments.

Figure 1 shows a mobile cellular telephone MS1 in accordance with the present invention, located on a train 10 and in the possession of a passenger (not shown). The telephone is registered with nearby cellular telephone network base station BS1 facilitating voice and data communication with that
30 base station and corresponding cellular telephone network. Data communication is intended to include sending text messages (for example using the short message service (SMS) protocol) and accessing the internet

This Page Blank (uspto)

(for example using WAP or i-mode protocols). Additionally, the telephone is receiving wireless broadcasts from a travel information beacon 11 located on the train using a short range wireless communications protocol such as Bluetooth™ (a trademark of Telefonaktiebolaget LM Ericsson, Sweden).

5 Referring to figure 2, mobile cellular telephone MS1 is shown in greater detail comprising a communications transmitter (Tx) and receiver (Rx) 21 connected to a communications antenna 20 and controlled by a communications microprocessor (μ c) 22 for communication with the base station BS1 with which it is registered. The same communications antenna and
10 receiver 21 are also adapted to receive the broadcasts of the travel information beacon 11. In an alternative arrangement, an additional antenna and receiver combination can be provided such that broadcasts from both the cellular telephone network base station and the travel information beacon are received and processed independently. As the design and manufacture of such
15 telephones for two-way communication within a cellular telephone network and with additional, independent wireless communication capability are well known, those parts which do not directly relate to the present invention will not be elaborated upon here further.

Figure 3 shows the travel information beacon of figure 1 in greater detail
20 also comprising a communications transmitter (Tx) and receiver (Rx) 31 connected to a communications antenna 30 and controlled by a communications microprocessor (μ c) 32. Travel related information (TI) is supplied to the microprocessor and duly broadcasted to nearby receivers on board the train of which MS1 is one.

25 Figure 4 illustrates the route 40 travelled by the train in which mobile telephone MS1 is located. The route consists of 8 stations and the train travels through the stations from station S1 to station S8, stopping at stations S1, S2, S3, S4, S6 before terminating at S8. That is, the train passes through but does not stop at stations S5 and S7. The travel information beacon broadcasts
30 schedule information 50 relating to the route 40 of the train as illustrated in figure 5. The schedule information 50 comprises the expected time taken for the train to travel from station n to the next station along the line t_n and an

This Page Blank (us)

indication of whether or not the train will stop at that particular station. For example, t_2 is the expected time taken for the train to travel from station 2 to station 3 and S2 is flagged Y indicating that the train does stop there, the converse being flagged N. As the train terminates at station S8, there is no value for t_8 , the expected time taken for the train to travel from station S8 to the next station. The travel information beacon also broadcasts the identity of the last stop that the train either went through or departed 51.

Referring back to figure 3, the travel related information TI supplied to the travel information beacon 11 must either include the schedule information or include information from which the schedule information can be determined. This may be provided to the communication microprocessor 32 beacon wirelessly, using removable computer storage media or in any other conventional manner of data transfer.

For the purposes of illustration, suppose that having just left station S1, the passenger in possession of mobile telephone MS1 wants to effect two mobile internet based services: first, the passenger wishes to request that a taxi is arranged to meet him/her upon arrival at their intended stop being station S6; and secondly, the passenger wishes to access information about hotels located in the area of their intended stop. The passenger first accesses the internet (www) 62 using their mobile cellular telephone in a conventional manner, as illustrated in figure 6, by transmitting and receiving data from the telephone MS1 via the base station BS1, a cellular network system controller (SC) 60, a public switched telephone network 61. The internet based service provider (SP) employs communication apparatus 63 connected to the web to communicate with the passengers' telephone. For the purposes of this illustration, the internet service provider provides both a taxi ordering service and provide hotel information though in practice, it is more likely that these services will be provided by different service providers.

Figure 7 shows the apparatus 62 employed by the remote internet based service provider in greater detail. As illustrated, the apparatus is arranged to receive, and deliver, signals to the internet 62 and includes a receiver 70 for receiving the travel-related request from the mobile telephone

This Page Blank (uspto)

MS1. The apparatus further includes a data base 72 of travel-related information including, for example, information about hotels located in the area of each station (S1 to S8) on the train route 40. A processor 71 connected to the receiver 70 serves to calculate a response to the travel-related request in the manner described below:

The passenger wishes to request that a taxi is arranged to meet him / her upon arrival at their intended stop, station S6. Once an indication of a desire to book a taxi has been made, for example by accessing a particular web site address, the internet based service provider requires, as illustrated in figure 8, the following information 80: an identifier (ID) which to identify the passenger, the location of the pick-up, i.e. the intended stop of the passenger, and the estimated TOA. The mechanism with which the taxi is ordered and the service provider reimbursed for providing that service is beyond the scope of this invention, but an example is further described in PCT patent application PCT/EP99/08054, publication number WO 00/41413. The internet based service provider may then send a message confirm booking of the taxi to the mobile telephone MS1 in the possession of the passenger.

The passenger wishes to access information about hotels located in the area of their intended stop. Once an indication of a desire for hotel information has been made, the internet based service provider requires, as illustrated in figure 9, only the location upon which the hotel information is to be based. The processor of the apparatus employed by the internet based service provider then retrieves from a database 72 the appropriate hotel information and arranges to submit that information for delivery back to the mobile telephone of the passenger.

In the arrangement described above and accordance with the present invention, the TOA information and the stop on route is provided as follows:

The schedule information 50 and information identifying the last stop that the train either went through or departed 51 is broadcast from the beacon to the mobile cellular telephone MS1 and the passenger's intended stop on route is provided to the mobile cellular telephone by the passenger in the manner described below. The TOA of the mobile telephone at the passenger's

This Page Blank (uspto)

intended stop on route is then estimated, both in relative terms minutes and absolute in relation to a time clock maintained by the microprocessor 22 of the cellular telephone. For example, where the passengers intended stop on route is station S6 and the beacon is indicating that the train has gone through or departed station S1, the relative TOA at station S6 ($rTOA_{1-6}$) can be approximated as follows:

$$rTOA_{1-6} = t_1 + t_2 + t_3 + t_4 + t_5 \quad \text{[Equation 1.1]}$$

$$\text{or } rTOA_{1-6} = t_2 + t_3 + t_4 + t_5 \quad \text{[Equation 1.2]}$$

$$10 \quad \text{or } rTOA_{1-6} = t_1/2 + t_2 + t_3 + t_4 + t_5 \quad \text{[Equation 1.3]}$$

As the train may either at station S1 or between station S1 and station S2, without further positional information, the validity of the component t_1 can not be established. As such, the TOA estimate can either include it (equation 1.1), discarded it (equation 1.2) or, reflecting a position between station S1 and station S2, include a proportion of it (equation 1.3). In equation 1.3, the proportion of $T1$ contributing to the TOA is one halve, though if a timer is employed to monitor the elapsed time from receipt of an indication from the travel information beacon that a station has been left of passed through, a more accurate interpolation can be applied. TOA estimates may be provided for either all or some stations on the route, or just for the passenger's intended stop.

Whilst the passenger could manually enter their intended stop, it is preferable to minimise the onus on data entry by the passenger by providing a mobile cellular telephone that deduces which of the stations are possible destinations for the passenger and presents a list of the possible destinations to the passenger for him/her to choose the correct one. In the above example, the passenger can not get off at stations S1, S5 or S7 and therefore the passenger may be presented with a list of stations consisting of S2, S3, S4, S6, and S8. Such a display 100 is illustrated in figure 10 where one of the list is highlighted 103 to indicate the currently selected option, and two graphics are displayed 101, 102 to indicated that the user can scroll up and down to

This Page Blank (uspto)

change the selected option using an appropriate user interface (not shown). Where there exists only one possible destination, for example S8 where the train has departed S6, that station can be automatically used to provide a TOA estimate without prompting or confirmation from the passenger.

5 Figures 11 and 12 shows an alternative mobile cellular telephone MS2 in accordance with the present invention and employed in an arrangement similar to that of shown in figure 1. In addition to the conventional components of mobile telephone MS1, telephone MS2 further comprises a GPS receiver (GPS Rx) 121 connected to a GPS antenna 120 and controlled by a
10 microprocessor 22. When operative, the GPS signals may be acquired and tracked for the purpose of deriving pseudorange information from which the location of the mobile telephone can be determined using conventional navigation algorithms. Such methods for GPS signal acquisition, tracking and position determination are well known, for example, GPS Principles and
15 Applications (Editor, Kaplan) ISBN 0-89006-793-7 Artech House.

 The schedule information 130 is provided to the mobile cellular telephone by an internet service over the cellular telephone network and is illustrated in figure 13 comprises Cartesian co-ordinates (x_n , y_n , z_n) describing the position of each station n on route, the expected time taken for the train to
20 travel from station n to the next station along the line t_n and an indication of whether or not the train with stop at that particular station. As an alternative to using the information identifying the last stop that the train either went through or departed 131, mobile cellular telephone MS2 is able to determine its own position (x , y , z) and compare its position to the position co-ordinates of the
25 stations on route to determine the stop on route that it is nearest to and therefore estimate a TOA at the passengers intended destination.

 Figure 14 illustrates an alternative deployment of travel information beacons in a train station 120 in which a train 10 is located on a track 121 adjacent a platform 122 and a ticket office 123. Travel information beacons
30 may be located on the platform, for example, broadcasting platform specific information, of at a ticket office or in or near to the ticket office. Using any one

This Page Blank (uspto)

of these beacons, mobile cellular telephones MS1 and MS2 may be provided with schedule information prior to the passenger getting on the train.

The use of remote internet access, travel information beacons, mobile telephones with positioning capability and other features described above
5 enables the estimation of a TOA to be done in many different ways including the following examples:

Example 1

A travel information beacon located on a train that is aware of its current
10 position (by any conventional means) and is in position of up to date schedule information for the train it is current location on. This information is sent using a Bluetooth wireless link to a mobile telephone in the possession of a passenger on the train and which contains an electronic ticket valid for a particular stop ahead on the route. Such ticketing is known and currently employed in, at least
15 to the applicants knowledge, train stations in Switzerland and Austria. For the stop designated by the electronic ticket, the TOA of the train at that stop is determined by the mobile telephone and the designated stop and TOA are automatically inserted into an SMS message further containing a request to be met at the train station by the passenger's spouse. That message may then be
20 transmitted to the user.

Example 2

As example 1 except that the travel information beacon determines TOAs for all stops ahead and sends the TOAs and identities of the stops to the
25 mobile telephone. The appropriate stop and TOA, designated by the electronic ticket, is then inserted into the SMS message.

Example 3

As example 2 except that the mobile telephone interrogates the travel
30 information beacon for the TOA at the stop designated by the electronic ticket.

inis Page Blank (uspto)

Example 4

As example 1 except that the schedule information is provided by the cellular telephone accessing a remote data store via a cellular telephone network. The beacon still provides the position of the train.

5

Example 5

A travel information beacon located at a train station is in position of up to date schedule information including the Cartesian co-ordinates of stations on routes of trains that pass through that particular station. This information is sent using a wireless link to a PDA in the possession of a passenger arriving at the station to board a train, the PDA having an integral GPS receiver. When on the train, the PDA determines its position and direction in relation to the train route and stops on that route. A TOA is calculated for a stop selected by the user from a list of such stops displayed to the user and the stop and TOA information is inserted in to an input field of an internet web page accessed by the PDA, the purpose of the web page being for pre-ordering taxis from a taxi service provider.

10
15Example 6

As example 5 except that only TOA information is sent, the taxi pick being inherent to taxi service provider or that particular web page, for example, a London taxi firms taxi ordering page for London Waterloo train station.

20

Example 7

As example 5 except that the PDA interrogates the travel information beacon for schedule information relating to a particular schedule, say as designated by an electronic ticket or selected by a user.

25

It should of course be appreciated that all the above-mentioned illustrations of the present invention are merely schematic in nature and the present invention is not restricted to the details of these illustrated embodiments. For example, the database 72 can be provided by means of a

30

This Page Blank (uspto)

local storage combination of ROM and RAM storage devices or may in fact be remote from the Internet Service Provider 63 and accessed by means of a separate web application. In this manner the Internet Service Provided 63 can advantageously be associated with a variety of different transport providers so as to increase the selection of travel-related information available and so increase the likelihood of providing the most appropriate response to the user. Also, the exact position of the mobile telephone MS2 need not be calculated at the mobile telephone itself but can rather also be calculated by means of the processor at the Internet service provider or by the mobile phone network.

10 Likewise, once having achieved an appropriate software download from the Internet connection illustrated in Fig. 1 to the mobile telephone 12, the mobile telephone can alternatively be enabled to conduct a local calculation serving to answer the user's travel-related request.

This Page Blank (uspto)

CLAIMS

1. A method of providing travel related information to a user of a mobile communications device comprising the steps of:

5 determining whether the mobile communications device is either travelling on a transport, has recently travelled on a transport, or is likely to travel on a transport at some time in the near future; and

depending on the outcome of that determination, displaying to a user on the mobile communications device selected travel related information.

10

2. A method according to claim 1 wherein the travel related information includes the identity of at least one location on the route of the transport.

15 3. A method according to claim 2 wherein the travel related information includes the identities of more than location on the route of the transport and wherein the user is able to select as an option one of the locations displayed.

20 4. A method according to claim 2 or claim 3 wherein the transport is a scheduled transport; and wherein the travel related information includes the identity of at least one scheduled stop on the route.

25 5. A method according to claim 4 wherein the mobile communications device is determined to be travelling on the scheduled transport; and wherein the travel related information only includes those stops at which the user may subsequently alight the scheduled transport.

30 6. A method according to claim 3 to 5 wherein the mobile communications device is determined to be travelling on the scheduled transport; and wherein the travel related information further includes estimated time-of-arrival (TOA) information, the method further comprising the steps of:

This Page Blank (uspto)

(iii) providing an estimate of the current position of the mobile communications device;

(iv) providing schedule information relating to the route of that transport; and

5 (v) calculating an estimate of the TOA of the scheduled transport for at least one subsequent stop on route.

7. A method according to claim 6 wherein the travel related information includes the identities and TOAs for more than one stop on the
10 route of the scheduled transport; and wherein the user is able to select as an option one of the stops displayed.

8. A method according to any of the preceding claims wherein the travel related information is displayed for the purpose of enabling to user of the
15 mobile communications device to access over a wireless link supplementary travel related information from an information service provider.

9. A method according to claim 8 wherein the travel related information displayed is an advertisement to obtain the supplementary travel
20 related information.

10. A method according to claim 8 or claim 9 wherein the travel related information comprises a link to a website or mailbox of the information service provider.
25

11. A method according to any of claims 8 to 10 wherein the supplementary information is specifically related to a location on the route of the transport.

30 12. A method according to any of claims 1 to 7 wherein the travel related information is displayed for the purpose of enabling to user of the

This Page Blank (uspto)

mobile communications device to procure over a wireless link a travel related service for or on behalf of the user from a service provider.

13. A method according to claim 12 wherein the travel related
5 information displayed is an advertisement for the travel related service.

14. A method according to claim 12 or claim 13 wherein the travel
related information comprises a link to a website or mailbox of the service
provider.

10

15. A method according to any of claims 12 to 14 wherein the travel
related service is specifically related to a location on the route of the transport.

16. A method according to any preceding claim wherein the travel
15 related information comprises advertising.

17. A method according to any preceding claim wherein the travel
related information comprises information obtained from a website.

18. A method according to claim 17 wherein upon the website is
20 automatically connected to upon the determination of whether the mobile
communications device is either travelling on a transport, has recently travelled
on a transport, or is likely to travel on a transport at some time in the near
future.

25

19. A method according to claim 1 in which at least part of the
determination of whether the mobile communications device is either travelling
on a transport, has recently travelled on a transport, or is likely to travel on a
transport at some time in the near future is done by identifying whether the
30 mobile communications device is currently or has recently received a message
broadcasted from a transmitter located either on the scheduled transport, on or

This Page Blank (uspto)

near the scheduled transport route or at or near a stop on the scheduled transport route.

20. A method according to claim 1 in which at least part of the determination of whether the mobile communications device is either travelling on a transport, has recently travelled on a transport, or is likely to travel on a transport at some time in the near future is done by identifying whether the mobile communications device is located on the route of a scheduled transport or at or near a scheduled transport terminus.

10

21. A method according to claim 20 wherein the mobile communications is currently or has recently received a message broadcasted from a transmitter located either on the scheduled transport, on or near the scheduled transport route or at or near a stop on the scheduled transport route, the message containing an estimate of the position of the transmitter; and wherein that position is used as an estimate of the position of the mobile communications device.

22. A method according to claim 20 wherein the mobile communications device comprises position determining means.

20

23. A method according to claim 22 wherein the position determining means is a GPS receiver.

24. A method according to claim 22 wherein the position determining means is a communications receiver and communications processor adapted to determine the position of the mobile communications devices in co-operation with a plurality of cellular communication base stations.

25

25. A method according to claim 1 in which at least part of the determination of whether the mobile communications device is either travelling on a transport, has recently travelled on a transport, or is likely to travel on a

30

This Page Blank (uspto)

transport at some time in the near future is done by identifying whether the mobile communications device has been instructed by the user that either the user is travelling on a scheduled transport, has recently travelled on a scheduled transport or intends to travel on a scheduled transport at some time
5 in the near future.

26. A method according to claim 1 in which at least part of the determination of whether the mobile communications device is either travelling on a transport, has recently travelled on a transport, or is likely to travel on a
10 transport at some time in the near future is done by identifying whether the mobile communications device is currently in possession of an electronic ticket permitting travel on a scheduled transport.

27. A method according to claim 26 wherein the travel related
15 information is specifically related to a route identified by the e-ticket.

28. A method according to claim 27 wherein the travel related information is specifically related to stop on the route identified by the e-ticket.

29. A mobile communications device adapted to receive and display
20 to a user travel related information provided by a method according to any of the preceding claims.

30. A mobile communications device comprising a processor for
25 determining whether the mobile communications device is either travelling on a transport, has recently travelled on a transport, or is likely to travel on a transport at some time in the near future.

31. A mobile communications device according to claim 30 further
30 comprising a display, wherein the mobile communications device is configured to display travel related information to a user of the mobile communications device depending on the outcome of the determination of whether the mobile

This Page Blank (uspto)

communications device is either travelling on a transport, has recently travelled on a transport, or is likely to travel on a transport at some time in the near future.

5 32. A mobile communications device according to claim 31 wherein the travel information includes the identity of at least one location on the route of the transport.

 33. A mobile communications device according to claim 32 wherein
10 the travel related information includes the identities of more than location on the route of the transport and wherein the user is able to select as an option one of the locations displayed.

 34. A mobile communications device according to claim 32 or claim
15 33 wherein the transport is a scheduled transport; and wherein the travel related information includes the identity of at least one scheduled stop on the route.

 35. A mobile communications device according to claim 34 wherein,
20 in the event that the mobile communications device determines that it is travelling on the scheduled transport, the travel related information displayed includes only those stops at which the user may subsequently alight the scheduled transport.

25 36. A mobile communications device according to claims 34 wherein the travel related information further includes estimated TOA information for at least one subsequent stop on route determined by the processor from an estimate of the current position of the mobile communications device and schedule information relating to the route of that transport.

30 37. A mobile communications device according to claim 36 wherein the travel related information includes the identities and TOAs for more than

This Page Blank (uspto)

one stop on the route of the scheduled transport; and wherein the user is able to select as an option one of the stops displayed.

38. A mobile communications device according to any of claims 30 to 5 37 further comprising a wireless link suitable for connecting to a remote information service provider; and wherein the travel related information is displayed for the purpose of enabling to user of the mobile communications device to access over that wireless link supplementary travel related information from that information service provider.

10

39. A mobile communications device according to claim 38 wherein the travel related information comprises a link to a website or mailbox of the information service provider.

15

40. A mobile communications device according to any of claims 30 to 37 further comprising a wireless link suitable for connecting to a remote travel related service provider; wherein the travel related information is displayed for the purpose of enabling to user of the mobile communications device to procure over the wireless link a travel related service for or on behalf of the 20 user from that service provider.

25

41. A mobile communications device according to claim 40 wherein the travel related information comprises a link to a website or mailbox of the service provider.

42. A mobile communications device according to any of claims 30 to 41 wherein the processor is configured to determine whether the mobile communications device is either travelling on a transport, has recently travelled on a transport, or is likely to travel on a transport at some time in the near 30 future by identifying whether the mobile communications device is currently or has recently received a message broadcasted from a transmitter located either

This Page Blank (uspia,

on the scheduled transport, on or near the scheduled transport route or at or near a stop on the scheduled transport route.

43. A mobile communications device according to any of claims 30 to
5 41 wherein the processor is configured to determine whether the mobile communications device is either travelling on a transport, has recently travelled on a transport, or is likely to travel on a transport at some time in the near future by identifying whether the mobile communications device is located on the route of a scheduled transport or at or near a scheduled transport
10 terminus.

44. A mobile communications device according to claim 43 wherein in the event that the mobile communications is currently or has recently received a message broadcasted from a transmitter located either on the
15 scheduled transport, on or near the scheduled transport route or at or near a stop on the scheduled transport route, and that message contains an estimate of the position of the transmitter, the processor of the mobile communications device is configured to subsequently use that position as an estimate of its own position.

20

45. A mobile communications device according to claim 43 further comprising position determining means.

46. A mobile communications device according to claim 45 wherein
25 the position determining means is a GPS receiver.

47. A mobile communications device according to claim 45 wherein the position determining means is a communications receiver and communications processor adapted to determine the position of the mobile
30 communications devices in co-operation with a plurality of cellular communication base stations.

This Page Blank (uspto)

48. A mobile communications device according to any of claims 30 to 41 wherein the processor is configured to determine whether the mobile communications device is either travelling on a transport, has recently travelled on a transport, or is likely to travel on a transport at some time in the near future by identifying whether the mobile communications device has been so instructed by a user.

49. A mobile communications device according to any of claims 30 to 41 wherein the processor is configured to store an electronic ticket permitting travel on a scheduled transport and to determine whether the mobile communications device is either travelling on a transport, has recently travelled on a transport, or is likely to travel on a transport at some time in the near future is done by identifying whether the mobile communications device is currently in possession of such a ticket.

15

50. A mobile communications device according to claim 49 wherein the travel related information is specifically related to a route identified by the e-ticket.

51. A mobile communications device according to claim 50 wherein the travel related information is specifically related to a stop on the route identified by the e-ticket.

52. A travel information beacon adapted to broadcast travel related information including schedule information relating to the route of a scheduled transport.

53. A travel information beacon according to claim 52 wherein the travel related information includes estimated TOA information relating to at least one stop on the route of the scheduled transport.

This Page Blank (uspto)

54. A travel information beacon according to claim 53 further comprising position determining means for determining an estimate of its position, wherein the estimated TOA information is calculated from an estimate of the current position of the travel information beacon and schedule
5 information relating to the scheduled transport.

55. A travel information beacon adapted to broadcast travel related information and an estimate of the position of the beacon.

10 56. A travel information beacon according to claim 55 further comprising position determining means for providing the estimate of the position of the beacon.

57. A travel information beacon according to claim 56 wherein the
15 position determining means is a GPS receiver.

58. A travel information beacon according to any of claims 55 to 57 wherein the travel related information includes schedule information relating to the route of a scheduled transport.
20

59. A travel information beacon according to any of claims 52 to 58 and located either on a scheduled transport, on or near the scheduled transport route or at or near a stop on the scheduled transport route.

25 60. A travel information beacon for broadcasting travel related information and located either on or near the scheduled transport route or at or near a stop on the scheduled transport route.

61. A travel information beacon according to claim 60 attached to a
30 shelter for a stop on the scheduled transport route.

This Page Blank (uspto)

ABSTRACT

**METHOD OF PROVIDING TRAVEL INFORMATION
TO A MOBILE COMMUNICATIONS DEVICE**

5

A method of providing travel related information to a user of a mobile communications device (MS1) is disclosed together with a corresponding mobile communications device (MS1) and a travel information beacon (11) for the same. The method comprising the steps of determining whether the mobile communications device (MS1) is either travelling on a transport (10), has recently travelled on a transport (10), or is likely to travel on a transport (10) at some time in the near future; and depending on the outcome of that determination, displaying to a user on the mobile communications device (MS1) selected travel related information.

15

[figure 1]



This Page Blank (uspto)

FIG. 1

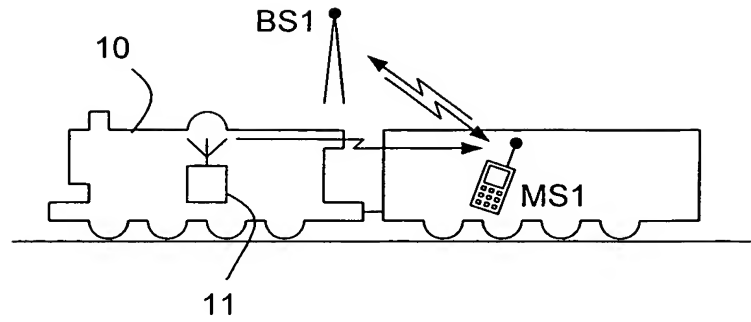


FIG. 2

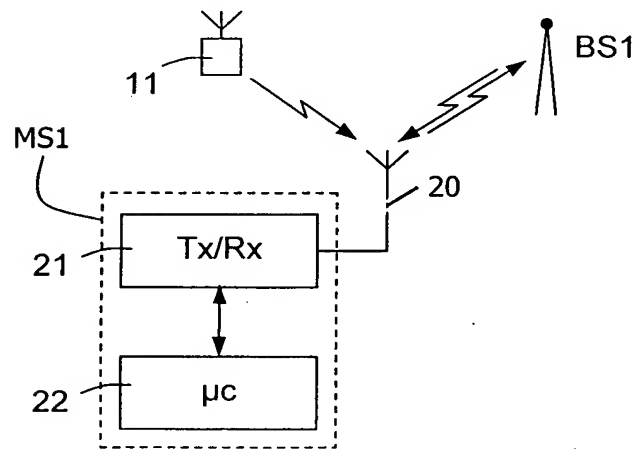


FIG. 3


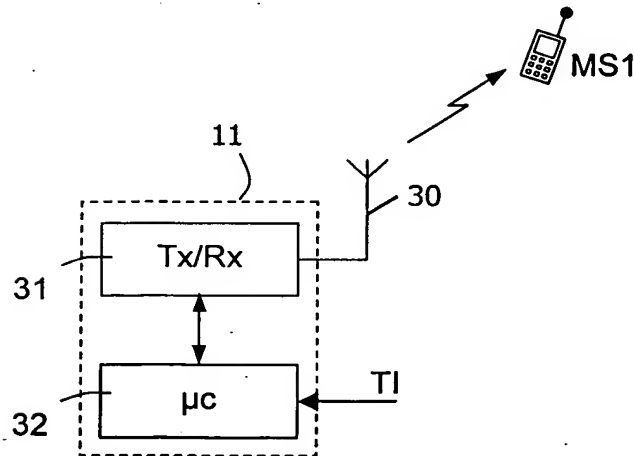


FIG. 4



This Page Blank (uspto,

This Page Blank (uspto,

FIG. 5

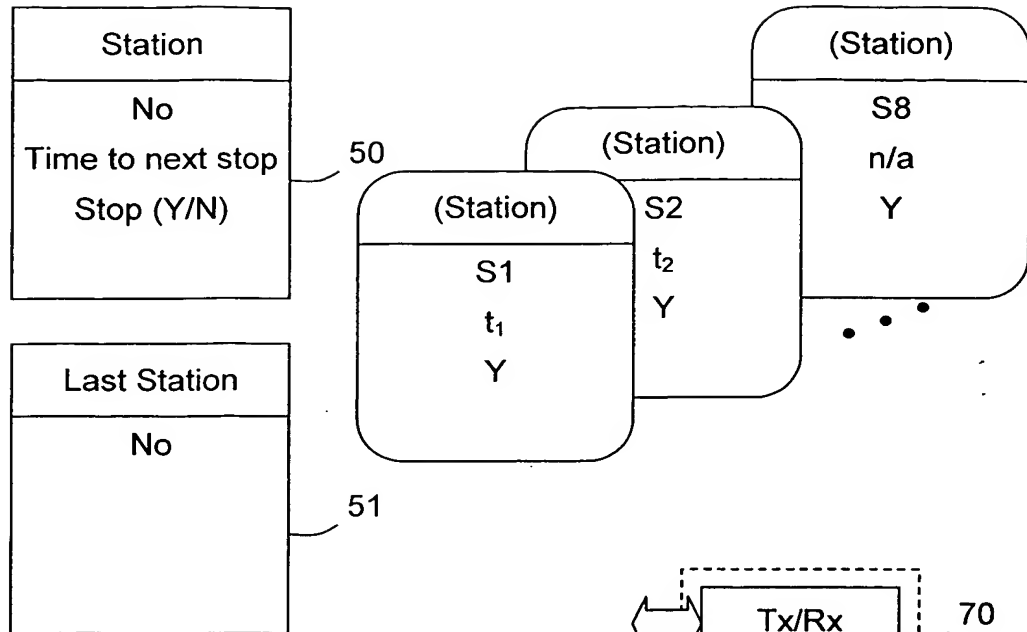


FIG. 6

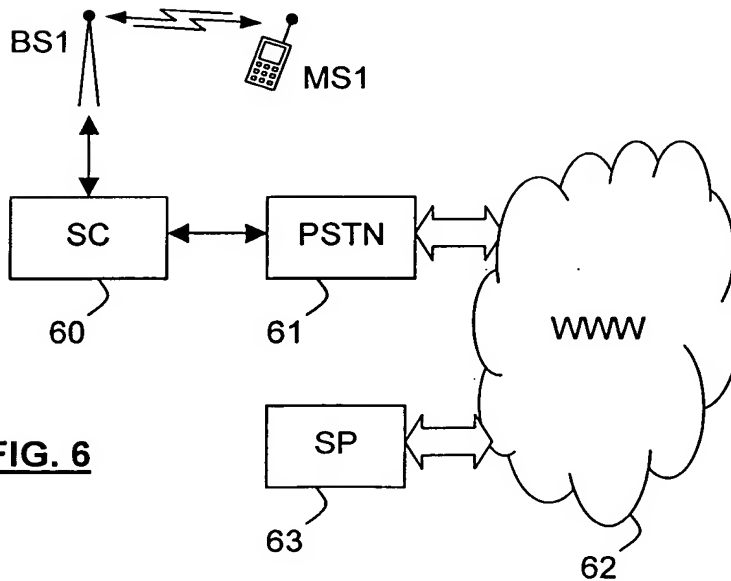


FIG. 7

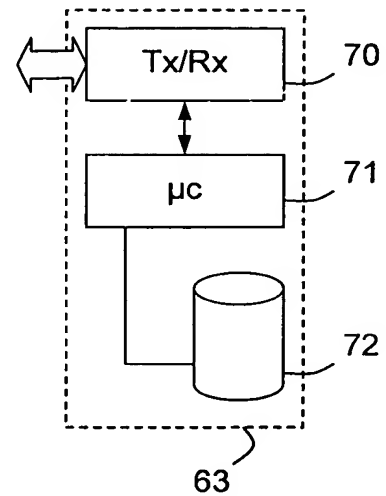


FIG. 8


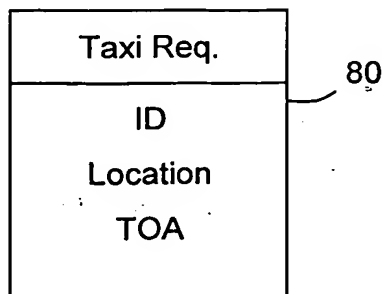


FIG. 9

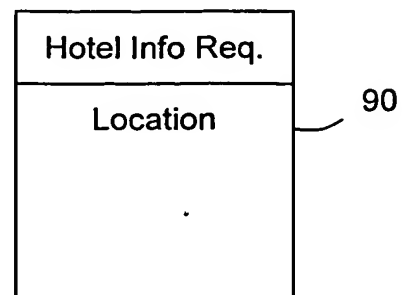

This Page Blank (uspic,

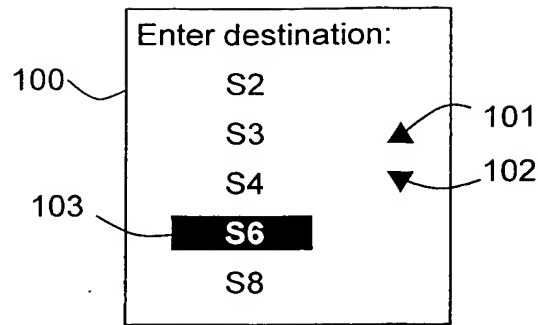


FIG. 10

FIG. 11


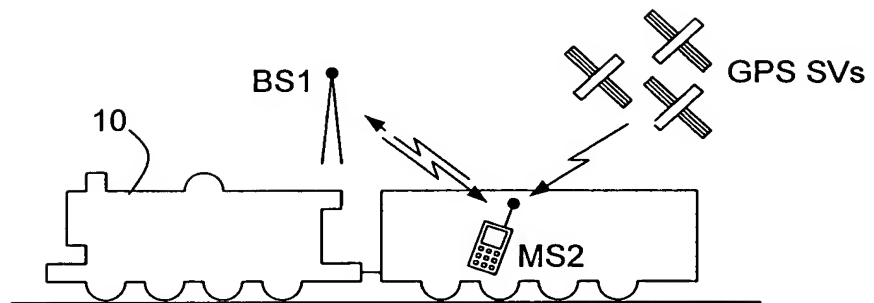


FIG. 12

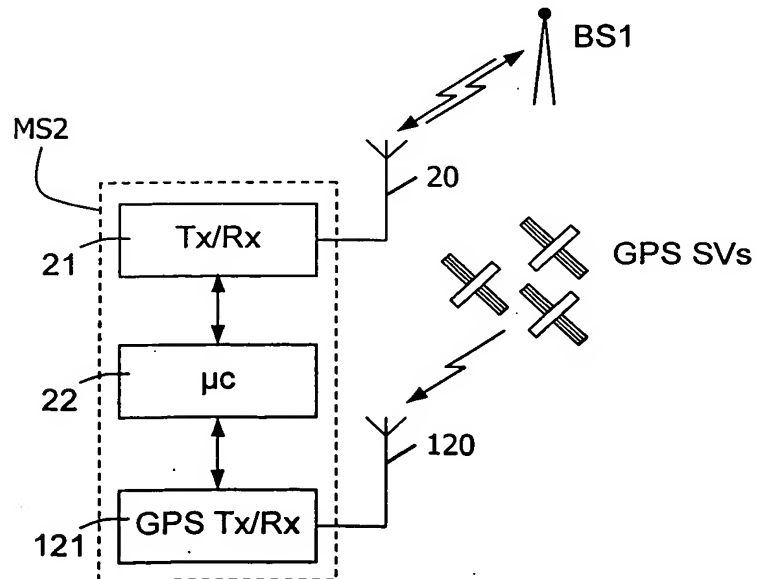

This Page Blank (uspto)

FIG. 13


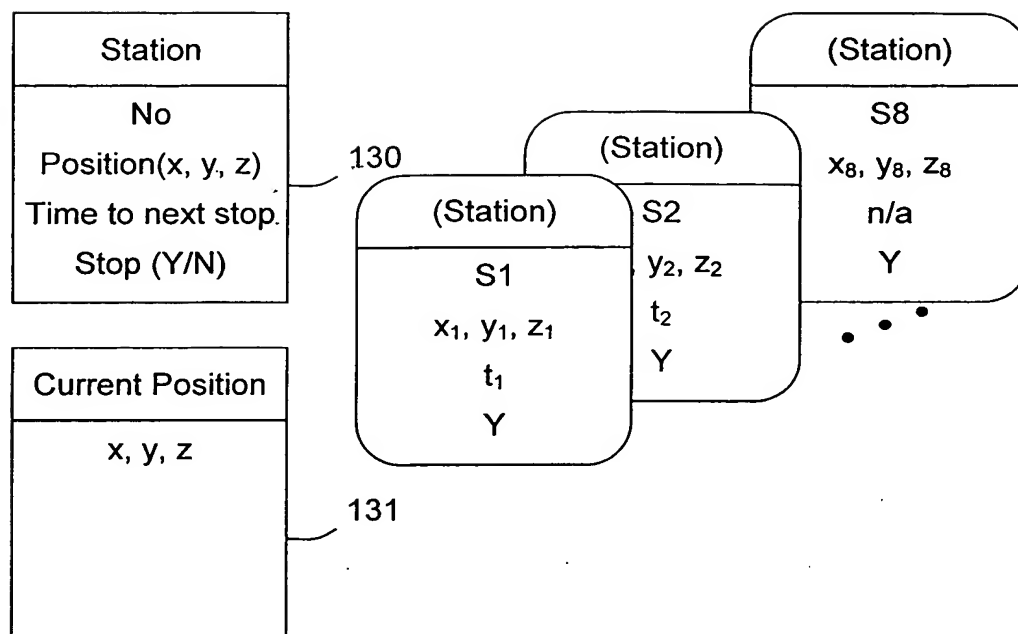


FIG. 14

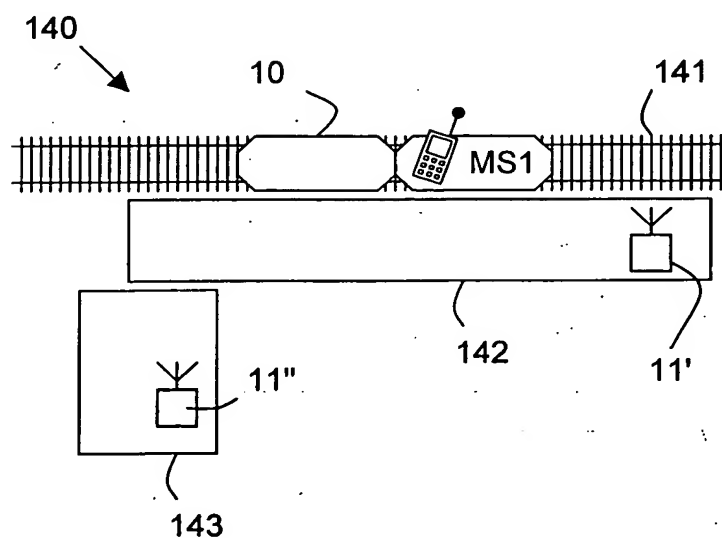

This Page Blank (uspic)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)